


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm		
NAME: Triplepar	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Astera LED Technology GmbH	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 26.63 lm/W			
MODEL	AX5	I _{max} (cd)	20689	S/MH(C0/180)	0.21
NOMINAL POWER(W)	45	LOR(%)	100.0	S/MH(C90/270)	0.21
RATED VOLTAGE(V)	90-264	TOTAL FLUX(lm)	1336.0	η UP,DN(C0-180)	0.1,52.8
NOMINAL FLUX(lm)	1335.98	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,47.0
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

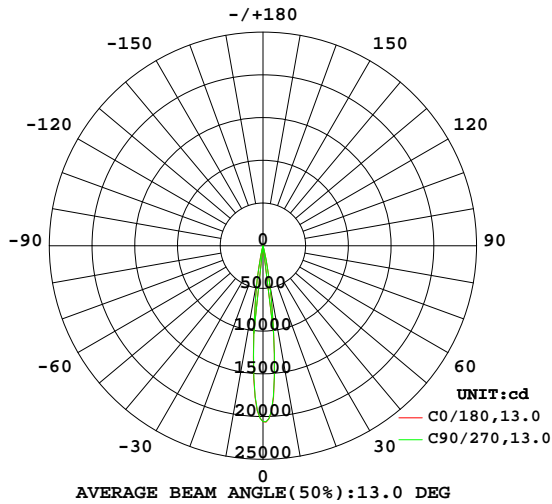

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

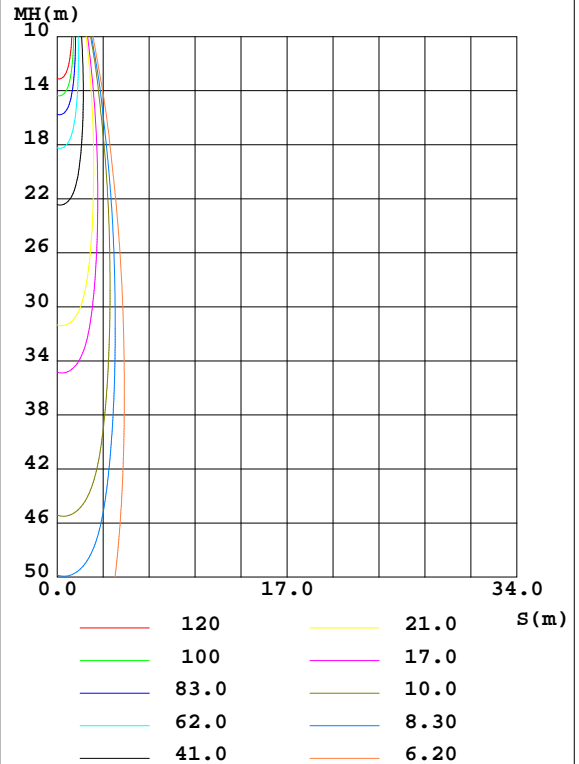

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	457.0	488.2	458.1	390.5	383.2	341.0	380.1	439.1	0- 10	993.1	993.1	74.3,74.3
20	15.08	15.33	15.10	14.31	14.63	14.55	14.55	15.87	10- 20	264.8	1258	94.2,94.2
30	3.594	3.694	3.582	3.369	3.428	3.368	3.358	3.684	20- 30	34.83	1293	96.8,96.8
40	1.764	1.760	1.748	1.699	1.930	1.955	1.638	1.888	30- 40	14.66	1307	97.9,97.9
50	1.273	1.348	1.229	1.191	1.256	1.207	1.154	1.271	40- 50	11.77	1319	98.7,98.7
60	0.7109	0.7645	0.6521	0.6547	0.6272	0.5919	0.5991	0.6098	50- 60	8.435	1328	99.4,99.4
70	0.3293	0.2717	0.2708	0.2291	0.3133	0.2190	0.1388	0.2055	60- 70	4.177	1332	99.7,99.7
80	0.0074	0.0009	0.0077	0.0001	0	0	0	0	70- 80	1.020	1333	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.0009	1333	99.8,99.8
100	0	0	0	0	0	0	0	0	90-100	0	1333	99.8,99.8
110	0	0	0	0	0	0	0	0	100-110	0	1333	99.8,99.8
120	0	0	0	0	0	0	0	0	110-120	0	1333	99.8,99.8
130	0	0	0	0	0	0	0	0	120-130	0	1333	99.8,99.8
140	0	0	0	0	0	0	0	0	130-140	0	1333	99.8,99.8
150	0	0	0	0	0.0002	0.0002	0	0	140-150	0.0000	1333	99.8,99.8
160	0.3790	0.3574	0.3138	0.4023	0.5420	0.5213	0.4774	0.4506	150-160	0.5641	1333	99.8,99.8
170	0.8040	0.8497	0.8032	0.8267	0.9357	0.8865	0.7751	0.8304	160-170	1.916	1335	99.9,99.9
180	0.7311	0.6597	0.6361	0.6766	0.6726	0.6814	0.6954	0.6689	170-180	0.7404	1336	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 1313.5 lm

%lum = 98.3%

%lamp = 98.3%

Conical surface Flux(120deg): 1327.6 lm

%lum = 99.4%


%lamp = 99.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity:56.4%
Test Distance:26.000m [K=1.3890]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm		
NAME: Triplepar	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Astera LED Technology GmbH	SUR.:	Shielding Angle:N/A

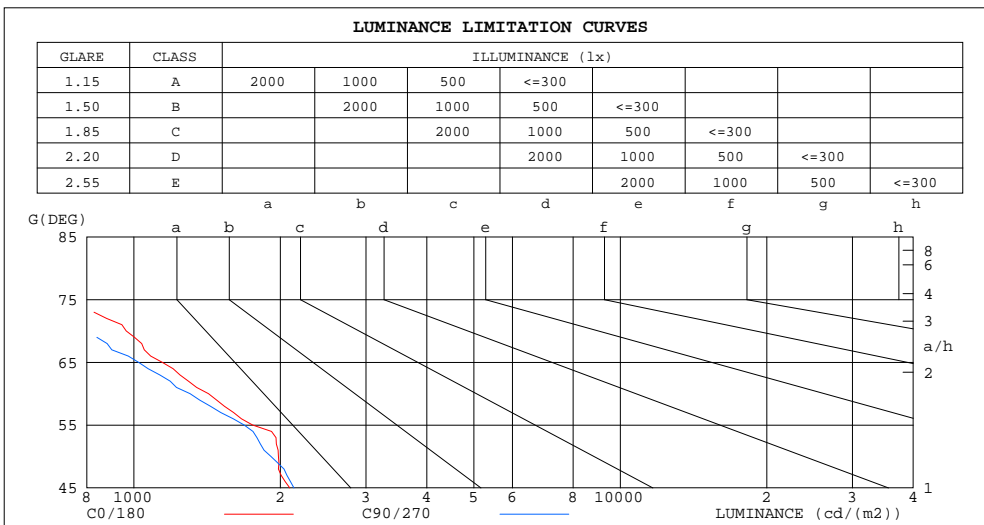

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	43	45
75	682	483
70	964	792
65	1144	1022
60	1424	1305
55	1754	1686
50	1983	1913
45	2092	2134

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks:

WEC AND CCEC

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm									
NAME: Triplepar					TYPE:LED			WEIGHT:N/A	
SPEC.:N/A					DIM.:			SERIAL No.:N/A	
MFR.: Astera LED Technology GmbH					SUR.:			Shielding Angle:N/A	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.111	.063	.020	.104	.060	.019	.092	.053	.017	.081	.046	.015	.070	.041	.013	
2.0	.100	.055	.017	.095	.052	.016	.085	.047	.015	.076	.042	.013	.067	.038	.012	
3.0	.091	.049	.015	.087	.047	.014	.079	.043	.013	.071	.039	.012	.064	.035	.011	
4.0	.084	.043	.013	.080	.042	.012	.073	.039	.012	.067	.036	.011	.061	.033	.010	
5.0	.077	.039	.011	.074	.038	.011	.068	.036	.010	.063	.033	.010	.058	.031	.009	
6.0	.071	.036	.010	.069	.035	.010	.064	.033	.010	.059	.031	.009	.055	.029	.009	
7.0	.067	.033	.009	.064	.032	.009	.060	.030	.009	.056	.029	.008	.053	.027	.008	
8.0	.062	.030	.009	.060	.030	.008	.057	.028	.008	.054	.027	.008	.050	.026	.008	
9.0	.059	.028	.008	.057	.028	.008	.054	.027	.008	.051	.026	.007	.048	.024	.007	
10.0	.055	.027	.007	.054	.026	.007	.051	.025	.007	.049	.024	.007	.046	.023	.007	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.168	.160	.152	.144	.137	.131	.099	.094	.090	.057	.055	.053	.018	.018	.017	
2.0	.149	.135	.123	.127	.116	.106	.087	.080	.074	.050	.047	.043	.016	.015	.014	
3.0	.132	.115	.101	.113	.099	.088	.078	.069	.062	.045	.040	.036	.014	.013	.012	
4.0	.118	.099	.085	.101	.086	.074	.070	.060	.052	.040	.035	.031	.013	.011	.010	
5.0	.106	.086	.072	.091	.075	.063	.063	.052	.044	.036	.031	.026	.012	.010	.009	
6.0	.096	.076	.062	.083	.066	.054	.057	.046	.038	.033	.027	.023	.011	.009	.007	
7.0	.087	.067	.053	.075	.058	.046	.052	.041	.033	.030	.024	.020	.010	.008	.006	
8.0	.080	.060	.046	.069	.052	.040	.048	.037	.029	.028	.022	.017	.009	.007	.006	
9.0	.074	.054	.041	.063	.047	.036	.044	.033	.025	.026	.019	.015	.008	.006	.005	
10.0	.068	.049	.036	.059	.042	.031	.041	.030	.022	.024	.018	.013	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm											
NAME: Triplepar					TYPE:LED			WEIGHT:N/A			
SPEC.:N/A					DIM.:			SERIAL No.:N/A			
MFR.: Astera LED Technology GmbH					SUR.:			Shielding Angle:N/A			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	4.2	4.7	4.4	4.8	5.0	3.7	4.1	3.9	4.3	4.4	
	3H	4.8	5.2	5.0	5.4	5.6	4.3	4.7	4.5	4.9	5.1
	4H	4.9	5.3	5.2	5.5	5.8	4.4	4.8	4.6	5.0	5.2
	6H	4.9	5.3	5.1	5.5	5.7	4.3	4.7	4.6	5.0	5.2
	8H	4.8	5.2	5.1	5.5	5.7	4.3	4.7	4.6	4.9	5.2
	12H	4.8	5.2	5.1	5.4	5.7	4.2	4.6	4.5	4.9	5.1
4H	2H	4.6	5.0	4.8	5.2	5.4	4.2	4.6	4.4	4.8	5.0
	3H	5.2	5.6	5.5	5.8	6.1	4.8	5.2	5.1	5.5	5.7
	4H	5.3	5.7	5.6	6.0	6.3	4.9	5.3	5.3	5.6	5.9
	6H	5.2	5.6	5.6	5.9	6.2	4.9	5.2	5.2	5.5	5.8
	8H	5.2	5.5	5.6	5.8	6.2	4.8	5.1	5.2	5.4	5.8
	12H	5.1	5.4	5.5	5.8	6.2	4.7	5.0	5.1	5.4	5.8
8H	4H	5.2	5.5	5.6	5.9	6.2	4.9	5.2	5.2	5.5	5.9
	6H	5.1	5.4	5.6	5.8	6.2	4.8	5.0	5.2	5.4	5.8
	8H	5.1	5.3	5.5	5.7	6.2	4.7	4.9	5.1	5.3	5.8
	12H	5.0	5.2	5.5	5.6	6.1	4.6	4.8	5.1	5.3	5.7
12H	4H	5.2	5.4	5.6	5.8	6.2	4.8	5.1	5.2	5.4	5.8
	6H	5.1	5.3	5.5	5.7	6.2	4.7	4.9	5.1	5.3	5.8
	8H	5.0	5.2	5.5	5.6	6.1	4.6	4.8	5.1	5.3	5.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.8					+ 0.5 / - 0.6					
1.5H	+ 0.8 / - 0.7					+ 0.4 / - 0.5					
2.0H	+ 1.2 / - 1.5					+ 1.0 / - 1.5					

CIE Pub.117, 1336 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.0$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:William
Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity:56.4%
Test Distance:26.000m [K=1.3890]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm		
NAME: Triplepar	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Astera LED Technology GmbH	SUR.:	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	81	90	84	81	89	84	81	77
0.80	97	92	89	97	92	88	95	91	88	85
1.00	101	96	93	100	96	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm		
NAME: Triplepar	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Astera LED Technology GmbH	SUR.:	Shielding Angle:N/A

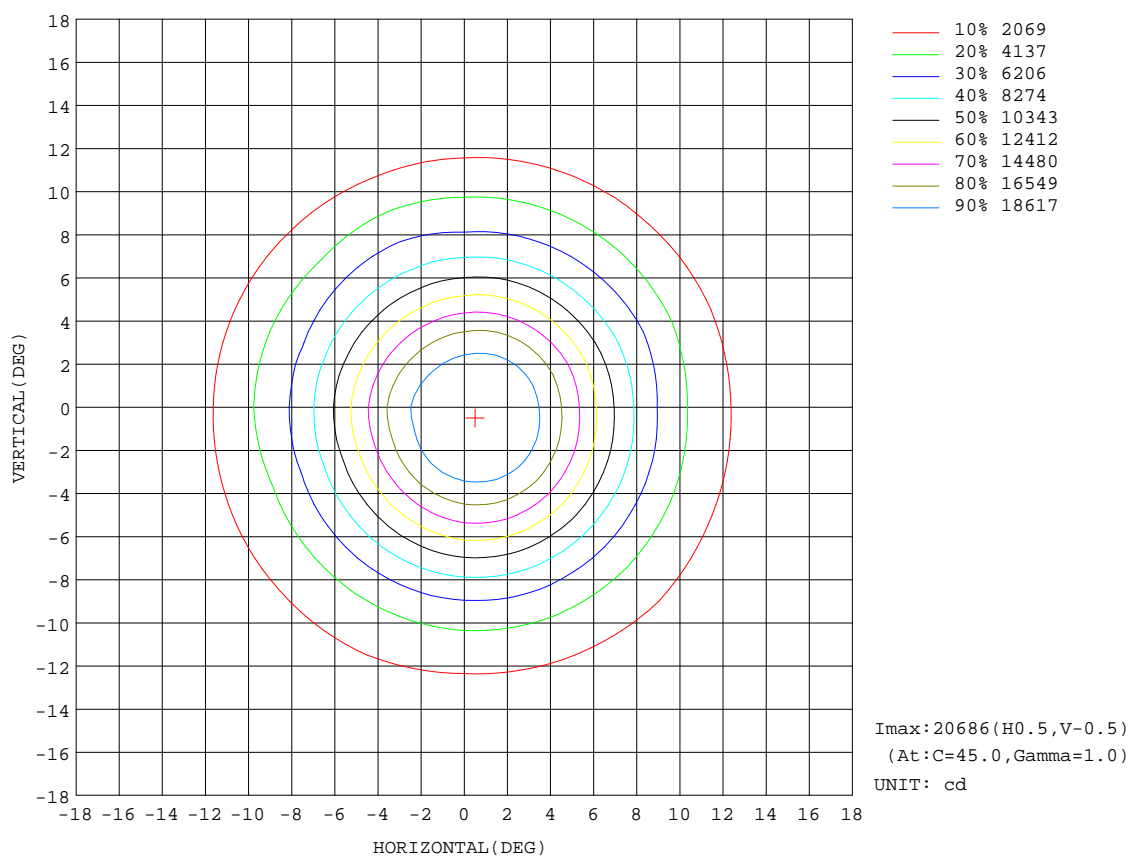


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 56.4%
 Test Distance: 26.000m [K=1.3890]
 Remarks:

AAI Figure

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm		
NAME: Triplepar	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Astera LED Technology GmbH	SUR.:	Shielding Angle:N/A

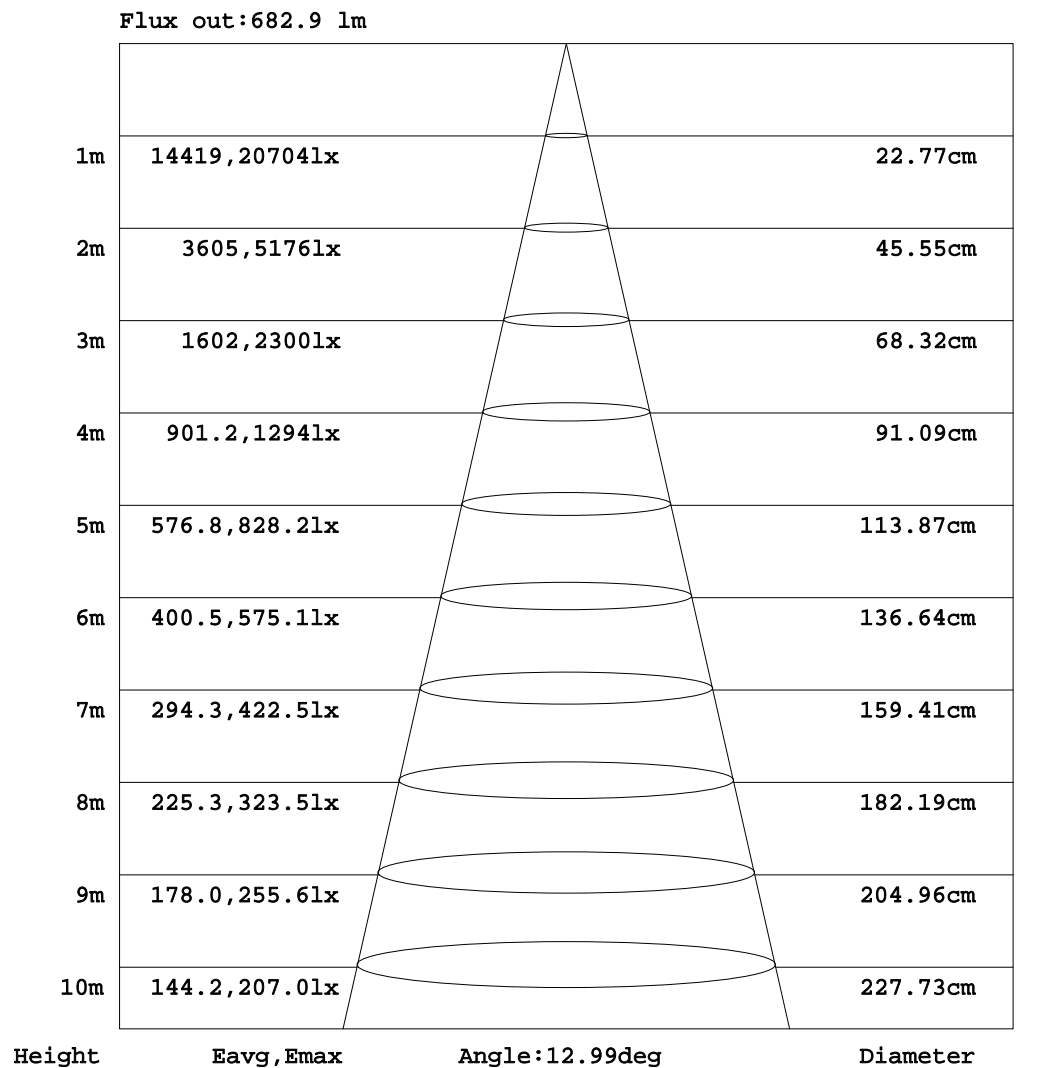


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks:

Planar Illuminance Curve

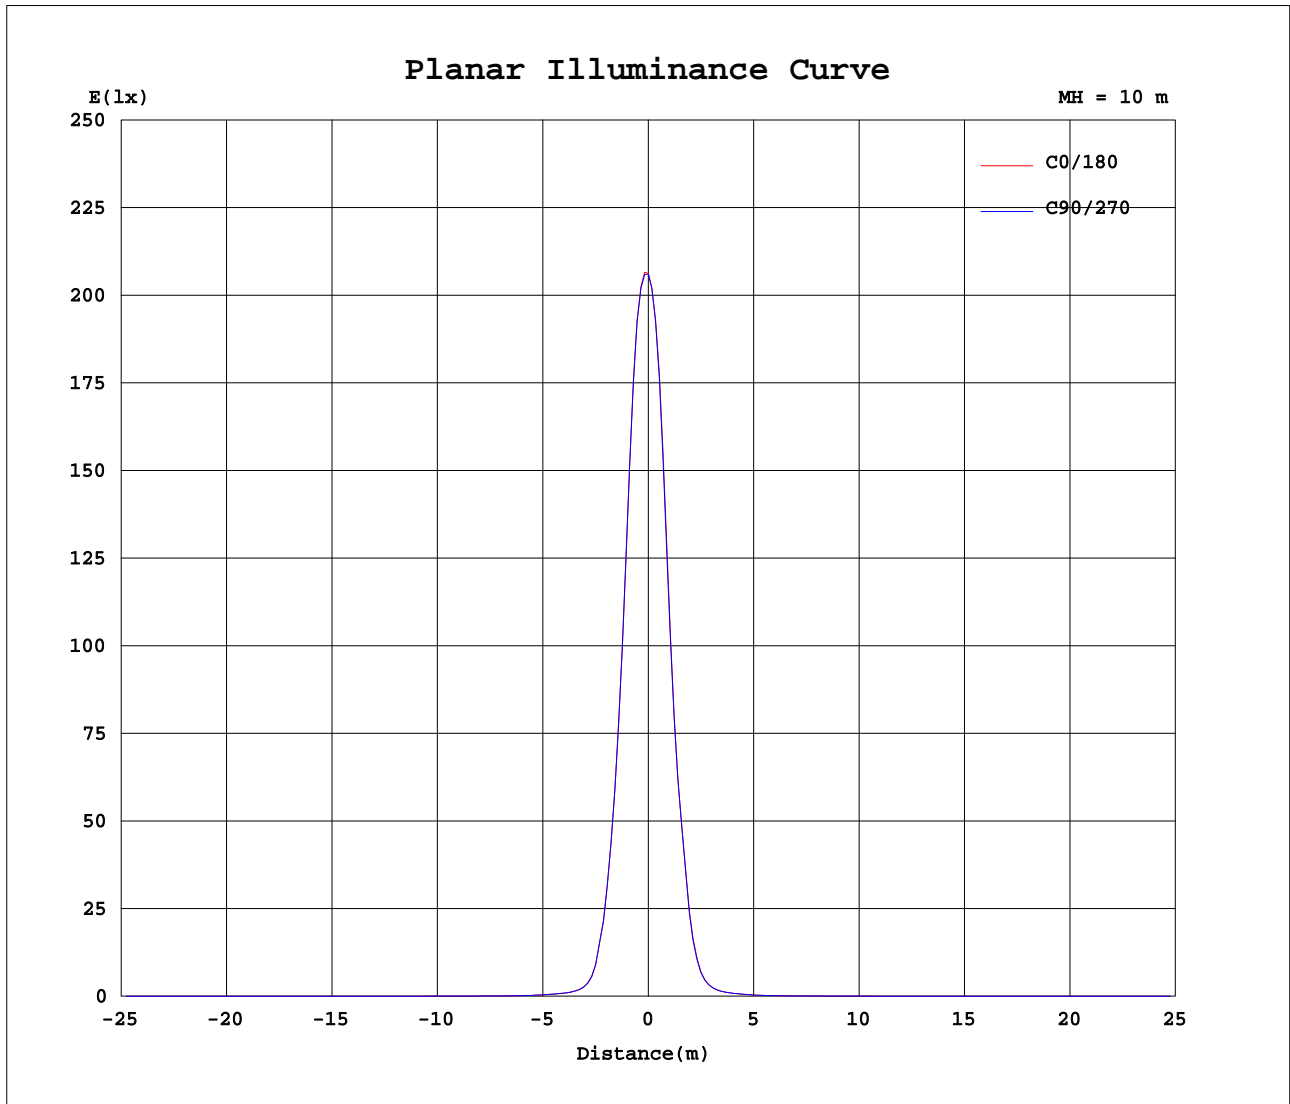

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity: 56.4%
Test Distance: 26.000m [K=1.3890]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.4355A P:50.169W PF:0.5232 Freq:50.01Hz Lamp Flux:1335.98x1 lm																		
NAME: Triplepar									TYPE:LED					WEIGHT:N/A				
SPEC.:N/A									DIM.:					SERIAL No.:N/A				
MFR.: Astera LED Technology GmbH									SUR.:					Shielding Angle:N/A				

Table--1

UNIT: ×10cd

γ (DEG) \ C(DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060			
5	1536	1583	1606	1593	1541	1461	1381	1323	1306	1261	1241	1244	1283	1353	1429	1507			
10	457	478	488	481	458	425	390	362	383	372	341	376	380	406	439	474			
15	64.7	66.1	68.9	66.4	62.9	58.2	53.5	51.4	53.1	51.3	50.8	50.1	52.1	56.3	61.9	66.1			
20	15.1	15.3	15.3	15.3	15.1	15.1	14.3	13.8	14.6	14.7	14.5	14.3	14.6	15.0	15.9	16.2			
25	7.62	8.11	7.79	7.43	7.38	7.39	7.03	6.69	7.07	6.97	6.86	6.87	7.09	7.20	7.62	8.02			
30	3.59	3.69	3.69	3.63	3.58	3.50	3.37	3.29	3.43	3.40	3.37	3.32	3.36	3.46	3.68	3.78			
35	2.31	2.29	2.32	2.33	2.28	2.23	2.17	2.15	2.23	2.23	2.27	2.11	2.08	2.16	2.29	2.23			
40	1.76	1.70	1.76	1.79	1.75	1.69	1.70	1.78	1.93	2.04	1.95	1.71	1.64	1.77	1.89	1.74			
45	1.48	1.46	1.53	1.54	1.51	1.41	1.44	1.53	1.65	1.77	1.60	1.46	1.44	1.63	1.64	1.47			
50	1.27	1.36	1.35	1.30	1.23	1.17	1.19	1.25	1.26	1.28	1.21	1.13	1.15	1.27	1.27	1.21			
55	1.00	1.18	1.12	0.89	0.97	0.92	0.96	0.94	0.91	0.90	0.86	0.85	0.85	0.94	0.91	0.91			
60	0.71	0.76	0.76	0.64	0.65	0.65	0.65	0.68	0.63	0.61	0.59	0.60	0.60	0.58	0.61	0.62			
65	0.48	0.48	0.51	0.45	0.43	0.43	0.43	0.46	0.43	0.39	0.37	0.38	0.34	0.31	0.37	0.38			
70	0.33	0.26	0.27	0.31	0.27	0.26	0.23	0.26	0.31	0.23	0.22	0.20	0.14	0.12	0.21	0.19			
75	0.18	0.12	0.11	0.13	0.12	0.10	0.10	0.10	0.12	0.09	0.04	0.04	0.00	0.01	0.03	0.05			
80	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.08	0.07	0.04	0.05	0.04	0.04	0.09	0.07	0.15	0.15	0.15	0.15	0.12	0.10	0.07	0.11			
160	0.38	0.36	0.36	0.33	0.31	0.31	0.40	0.34	0.54	0.54	0.52	0.54	0.48	0.44	0.45	0.45			
165	0.66	0.66	0.69	0.64	0.57	0.53	0.72	0.67	0.86	0.85	0.92	0.94	0.73	0.64	0.87	0.80			
170	0.80	0.83	0.85	0.81	0.80	0.80	0.83	0.81	0.94	0.94	0.89	0.88	0.78	0.70	0.83	0.87			
175	0.79	0.84	0.77	0.82	0.83	0.74	0.81	0.78	0.70	0.71	0.69	0.69	0.68	0.65	0.67	0.69			
180	0.73	0.68	0.66	0.67	0.64	0.64	0.68	0.65	0.67	0.69	0.68	0.67	0.70	0.65	0.67	0.67			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-12-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:56.4%
 Test Distance:26.000m [K=1.3890]
 Remarks: